
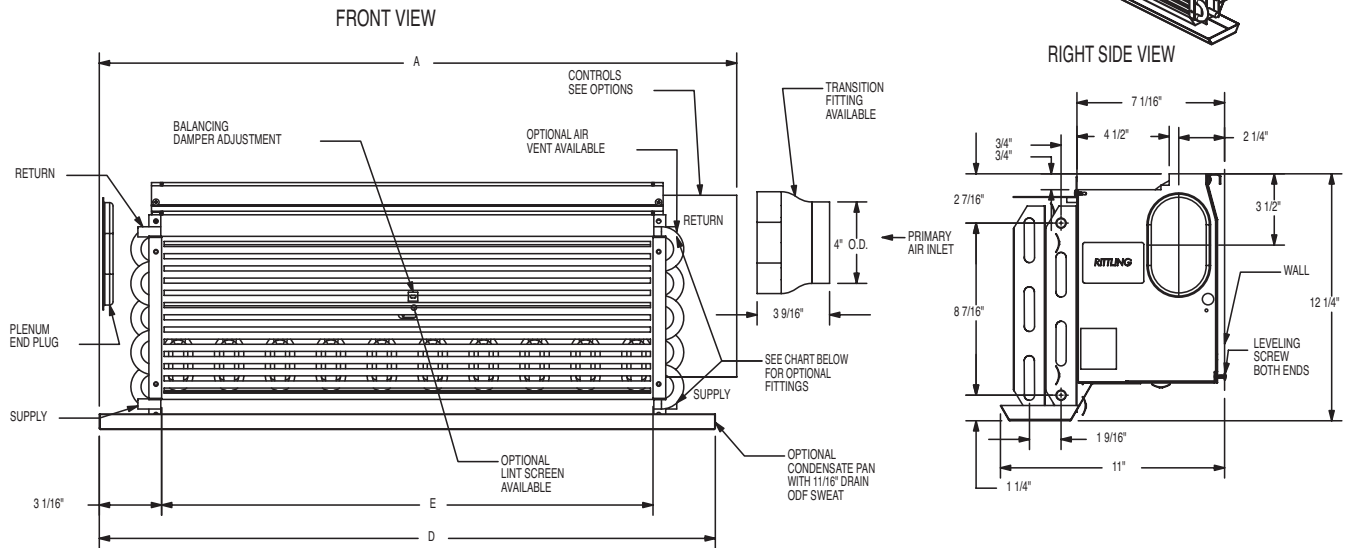


MODEL V4L



UNIT SIZE (V4L)	24"	32"	40"	52"
DIMENSIONS (IN.)				
BASE UNIT (A)	31-1/16"	38-15/16"	46-15/16"	58-15/16"
DRAIN PAN (D)	29-1/2"	37-1/2"	45-1/2"	57-1/2"
NOM. COIL (E)	24-1/8"	32"	40"	52"
MIN FREE AREAS (SQ. IN.)				
DISCHARGE GRILLE	81	108	135	175
RECIRCULATION GRILLE	124	165	206	269
APPROX. SHIPPING WT. (LB)				
	26	31	36	47

OPTIONAL FITTINGS	
CODE DIGIT #9	DESCRIPTION
0	1/2" ODF SWEAT FITTING
1	1/2" ODF SWEAT FITTING W/VENT
2	1/2" ODM FLARE FITTING
3	1/2" ODM FLARE FITTING W/VENT

NOTES:

1. THERMOSTAT MOUNTED ON RIGHT SIDE ONLY OR ON THE WALL
2. SLAVE UNITS DIMENSIONALLY THE SAME, EXCEPT WITHOUT CONTROLS
3. CONDENSATE CONNECTION MOUNTED SAME SIDE AS COOLING COIL CONNECTION
4. SHIPPING WEIGHT INCLUDES PACKAGING
5. ORIENTATION OF COIL CONNECTIONS TO BE DETERMINED
6. INNER COIL IS ALWAYS FOR COOLING AND DETERMINES WHETHER IT IS RH OR LH CONNECTIONS. HEATING COIL CONNECTIONS ARE OPPOSITE OF COOLING CONNECTIONS

DESCRIPTION:

THE V4L IS SHIPPED FROM THE FACTORY WITH THE FOLLOWING:

- ACOUSTICALLY DESIGNED PLENUM AND NOZZLES AS SPECIFIED
- ONE 6-TUBE COIL WITH COPPER TUBES AND ALUMINUM FINS
- CONDENSATE PAN AS SPECIFIED
- COIL CONNECTIONS AS SPECIFIED
- HARDWARE KIT INCLUDES:
 - (2) LEVELING SCREWS
 - (2) LEVELING SCREW CLIPS
 - (4) LINT SCREEN CLIPS
 - (2) COIL CONDENSATE PLATES WITH CLIPS