
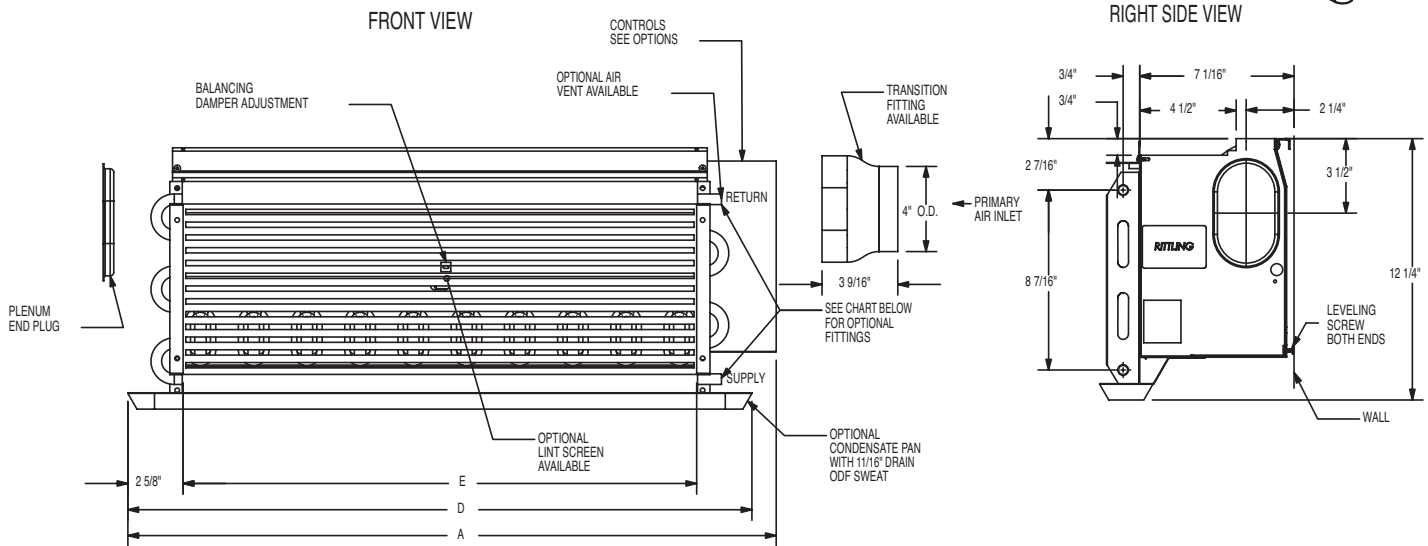


### MODEL VL



UNIT SIZE (VL)	24"	32"	40"	52"
<b>DIMENSIONS (IN.)</b>				
BASE UNIT (A)	30-5/8"	38-1/2"	46-1/2"	58-1/2"
DRAIN PAN (D)	29-1/2"	37-1/2"	45-1/2"	57-1/2"
NOM. COIL (E)	24-1/8"	32"	40"	52"
<b>MIN FREE AREAS (SQ. IN.)</b>				
DISCHARGE GRILLE	81	108	135	175
RECIRCULATION GRILLE	124	165	206	269
<b>APPROX. SHIPPING WT. (LB)</b>				
	21	26	31	38

#### NOTES:

1. THERMOSTAT MOUNTED ON RIGHT SIDE ONLY OR ON THE WALL
2. SLAVE UNITS DIMENSIONALLY THE SAME, EXCEPT WITHOUT CONTROLS
3. CONDENSATE CONNECTION MOUNTED SAME SIDE AS COIL CONNECTION
4. SHIPPING WEIGHT INCLUDES PACKAGING

OPTIONAL FITTINGS	
CODE DIGIT #9	DESCRIPTION
0	1/2" ODF SWEAT FITTING
1	1/2" ODF SWEAT FITTING W/VENT
2	1/2" ODM FLARE FITTING
3	1/2" ODM FLARE FITTING W/VENT

#### DESCRIPTION:

THE VL IS SHIPPED FROM THE FACTORY WITH THE FOLLOWING:

- ACOUSTICALLY DESIGNED PLENUM AND NOZZLES AS SPECIFIED
- ONE 6-TUBE COIL WITH COPPER TUBES AND ALUMINUM FINNS
- CONDENSATE PAN AS SPECIFIED
- COIL CONNECTIONS AS SPECIFIED
- HARDWARE KIT INCLUDES:
  - (2) LEVELING SCREWS
  - (2) LEVELING SCREW CLIPS
  - (4) LINT SCREEN CLIPS
  - (2) COIL CONDENSATE PLATES WITH CLIPS